


So, you're getting a
NIFTY HOOPS
Hoophouse Delivery!




You must be prepared for your delivery. Prepare the route of approach so your driver can get as close as possible to the build site, and has an area to back up or turn around

When your hoophouse arrives:

Your hoophouse will arrive on a flatbed trailer, and you will need to unload it. Your driver works for a 3rd party hauling company and will not help unload materials

If you have a strong forklift, you can pick up the entire structure at once.

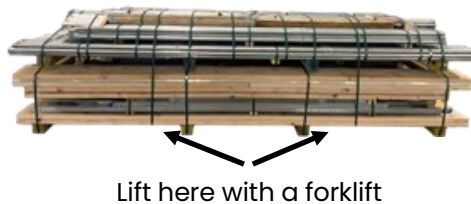

If you have a tractor with forks, you should break your materials into two bundles. Cut the green bands that wrap around the entire pack (**do not cut bands wrapped around individual bundles**), detaching the upper steel pack from the lumber pack below. Lift each separately.



If you are unloading by hand, you will need a partner to lift with. Depending on the size of your hoophouse, the heaviest bundles can be over 250 lbs and must be lifted with one strong person at each end.

- Cut the outer bands, detaching the upper steel pack from the lumber pack below
- Cut bands that wrap all the way around the upper pack, leaving the bands that hold together the individual bundles of steel
- Unload all bundles in top pack, waiting to cut any banding on lower pack until finished
- Cut bands on lower pack, unload lumber and square endwall steel, then unload bows and other parts within (lower pack pictured below)

